


Soft seated check valve with diaphragm, durable and maintenance free, pressure-shock-absorbing, suitable for any installation position. Applications include water treatment, water distribution and industrial plants.

Futures:

- Face to Face acc. EN 558-1 Line 48 (DIN3202/F6)
- Size: DN40 to DN400
- Flange connection acc. DIN EN 1092-2 PN10-PN16

- No mechanical moving parts
- Soft seated
- aerodynamically
- low noise operation

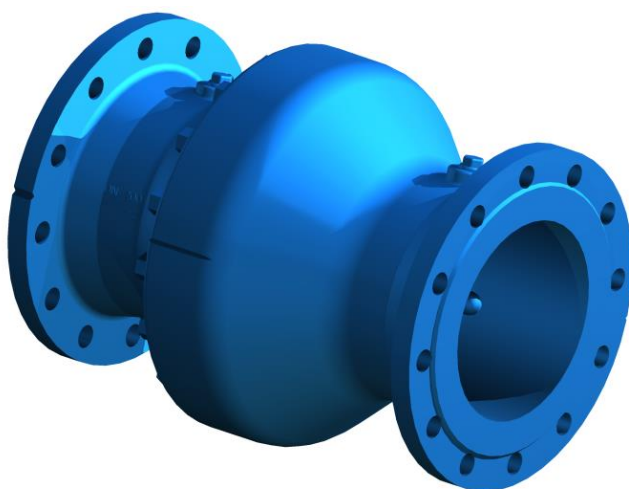

Material

- **Body:**
 - ✚ EN- JS (GGG-40)
Other materials on request

- **Diaphragm:**
 - ✚ EPDM / KTW
 - ✚ NBR
Other materials on request

- **Bolts:**
 - ✚ stainless steel
Other materials on request

Corrosion protection:

- EKB powder coated, RAL5015 blue
other coating systems and RAL colors on request

Application:

- Water management
- Industry
- Building technology

Our approvals

