


**Resilient seated check valve with rubber ball, maintenance friendly,
with free passage particularly suitable for use in sewers and in industry**

Features:

- Face to Face acc. EN 558-1 Line 48 (DIN3202/F6)
- Size: DN40 to DN300
- Flange connection acc. DIN EN 1092-2 PN10
- With lifting device
- Soft sealing
- Maintenance friendly
- Soft close
- Sinking ball
- LGA approval DN65 - 150

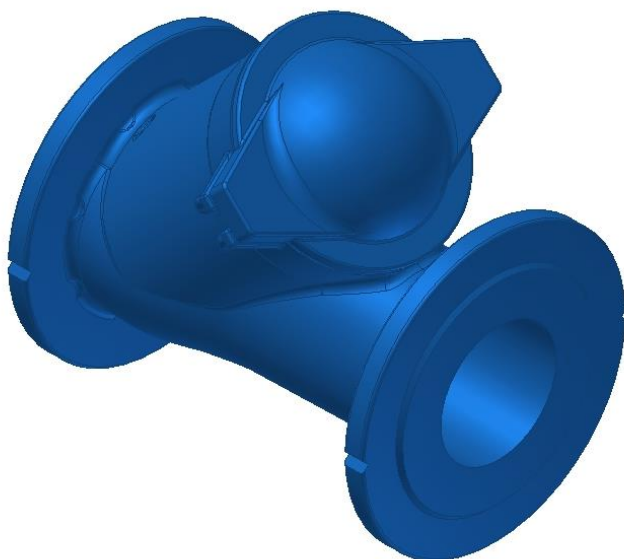

Material

- **Body:**
✚ EN-JS 1030 (GGG 40)
Other material on request
- **Ball:**
✚ Aluminium
Other material on request
- **Gumming**
✚ NBR
Other material on request
- **bolts and nuts:**
✚ Stainless steel V4A
Other material on request

Corrosion protection:

- EKB Powder coated, RAL5015, sky blue
other coating systems and RAL colors on request



application:

- Water management
- Industry
- Process engineering

Our approvals



dimensions and weight

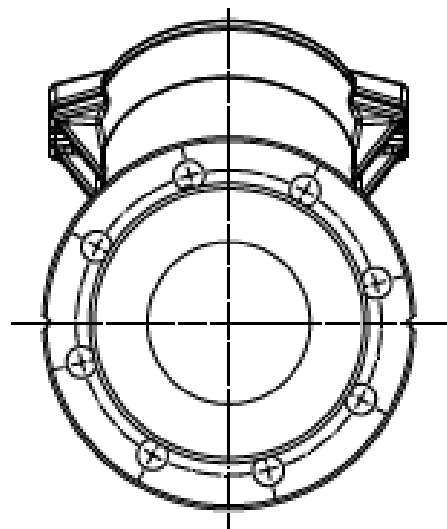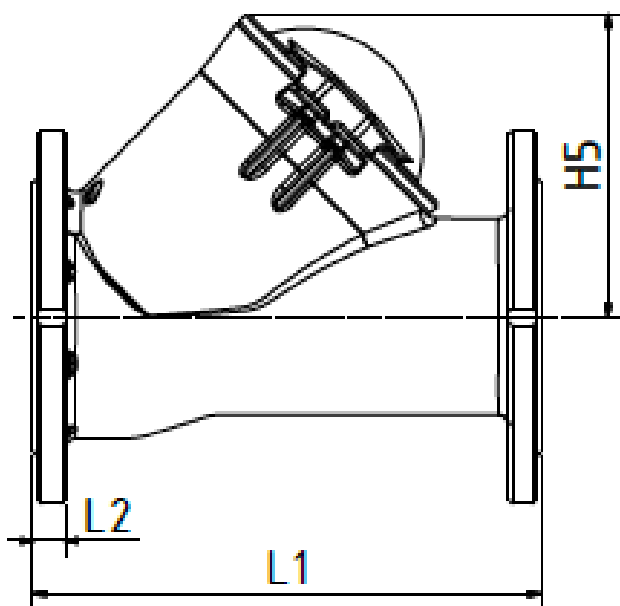

Size DN	F-T-F L1	L2	H5	Ball	weight
mm	mm	mm	mm	mm	kg
40	180	18	90	50	3,5
50	200	19	105	60	4
65	230	19	125	80	12
80	260	19	155	95	15
100	300	19	170	119	23
125	350	19	210	150	34
150	400	19	240	180	47
200	500	20	320	248	86
250	600	22	420	310	145
300	700	24,5	470	360	209

Other diameter on request