

3-way aeration venting valve for water, EKB-coated, large nozzle
With sealing set of bronze and small nozzle with self-cleaning roller seal

product features:

- Size: DN50 to DN300
- Flange acc. to DIN EN 1092-2 PN10-PN25
- protection against negative pressure / vacuum
- Automatic air-venting
- duration and operational venting
- Pressure range PN10 0,1 – 10 bar
- Pressure range PN16 0,2 – 16 bar
- Pressure range PN25 0,2 – 25 bar
- With DVGW approval



materials

- **Body:**
 - ✚ EN-JS 1030 (GGG 40)
Other materials on request
- **Swimmer:**
 - ✚ Stainless steel
Other materials on request
- **Seal:**
 - ✚ EPDM
 - ✚ Viton
Other materials on request
- **Sealing seat**
 - ✚ Bronze
 - ✚ Stainless steel
 - ✚ Duplex
Other materials on request
- **Body upper part:**
 - ✚ Nylon fiber reinforced
Other materials on request

Corrosion protection:

- EKB-powder coated, 250µm, RAL5005, blue
other coating systems and RAL colors on request

Application:

- Water management
- Industry
- process engineering
- Plant construction


Accessories:

- flushing tap
- ventilation spear

our approvals



dimensions and weight

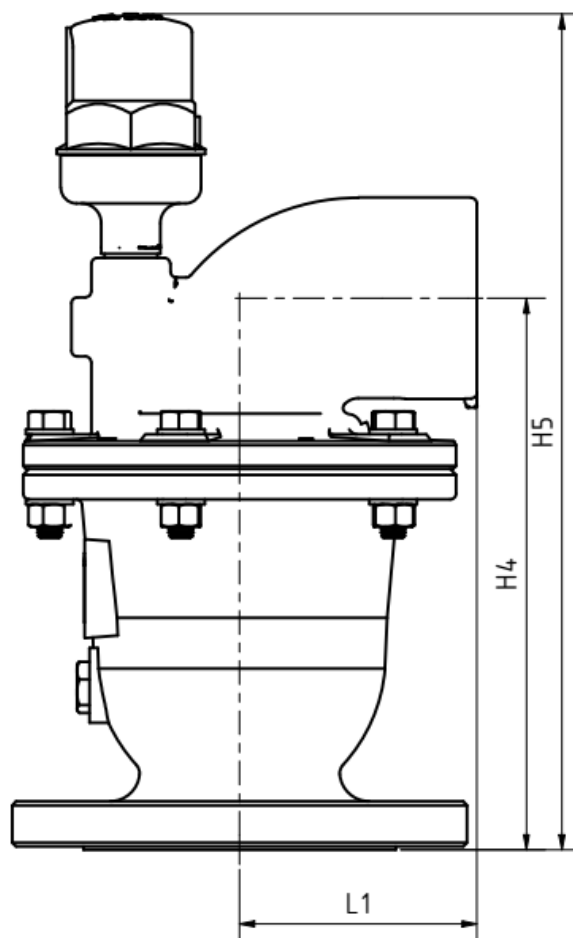

Size DN	big nozzle	Venting- connection	L1	H4	H5	weightt
mm	mm ²		mm	mm	mm	kg
50	794	1,5" IG	75	196	306	7
80	1.809	2" IG	100	205	373	13
100	3.317	3" IG	120	275	424	19
150	7.850	4" IG	141	331	482	39
200	17.662	6" Nut	240	504	587	80

Other diameters on request